


## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability .Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

## MECHANICAL DATA

- Case: JEDEC DO-41 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.012ounce, 0.33 gram

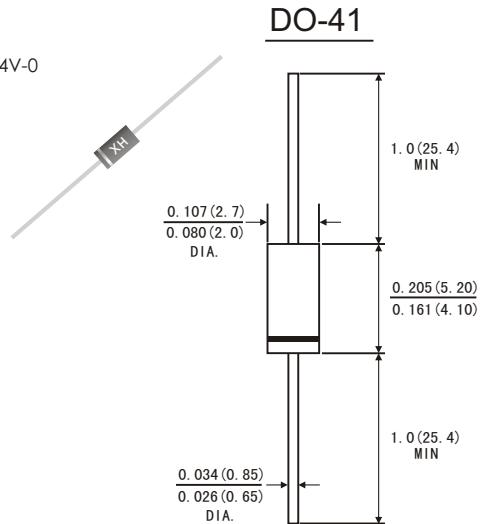

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	SR 120	SR 130	SR 140	SR 150	SR 160	SR 180	SR 1100	SR 1150	SR 1200	Units							
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	200	Volts							
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	57	71	105	140	Volts							
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	200	Volts							
Maximum average forward rectified current 0.375"(9.5mm) lead length(see Fig. 1 )	I <sub>(AV)</sub>	1.0								Amp								
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	40.0								Amps								
Maximum instantaneous forward voltage at 1.0 A(Note 1 )	V <sub>F</sub>	0.55		0.70		0.85		0.90		0.95	Volts							
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1 )	I <sub>R</sub>	$T_A = 25^\circ C$	0.2								mA							
			10															
Typical junction capacitance(Note 3)	C <sub>J</sub>	110								pF								
Typical thermal resistance(Note 2)	R <sub>θJA</sub> R <sub>θJL</sub>	50.0 15.0								°C/W								
Operating junction temperature range	T <sub>J</sub>	-65 to+150								°C								
Storage temperature range	T <sub>STG</sub>	-65 to+150								°C								

Notes: 1.Pulse test: 300  $\mu s$  pulse width,1% duty cycle

2.Thermal resistance (from junction to ambient)Vertical P.C.B. mounted , with 1.5 X1.5"(38X38mm)copper pads

3.Measured at 1.0MHz and reverse voltage of 4.0 volts

## RATINGS AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

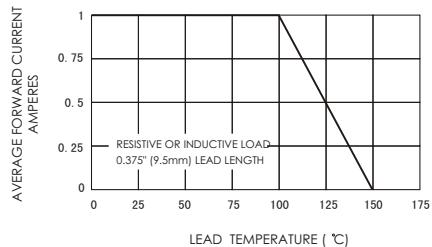


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

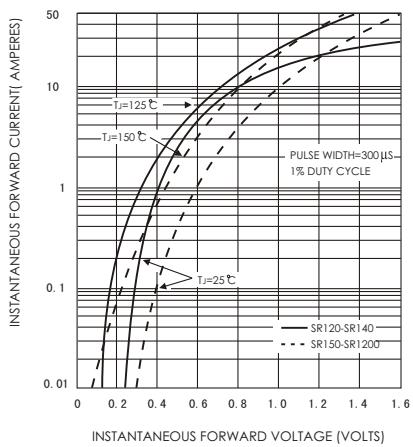


FIG.5-TYPICAL JUNCTION CAPACITANCE

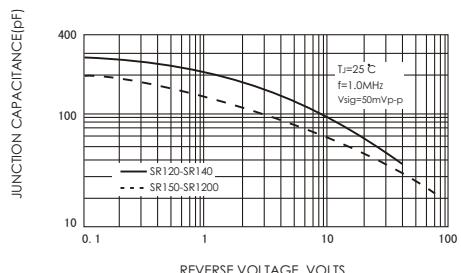


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

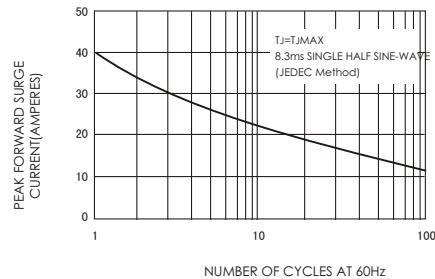


FIG.4-TYPICAL REVERSE CHARACTERISTICS

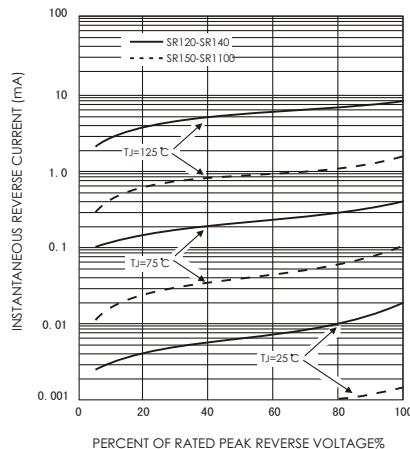


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

